


C1022 STEEL CASE HARDEN
(CASE HARDNESS 450-720HV, CORE HARDNESS 270-420HV)
DOUBLE COUNTERSUNK HEAD WOOD SCREWS
TWINFAST TWIN LEADS



SIZE	4 #	5 #	6 #	7 #	8 #	10 #	12 #	14 #
Head dia. (A)	5.21 5.49	5.89 6.20	6.55 6.91	7.24 7.62	7.92 8.33	9.27 9.75	10.62 11.18	11.99 12.60
Head dia. (A2)	2.70 2.90	3.05 3.25	3.35 3.60	3.70 3.95	4.05 4.30	4.75 5.00	5.45 5.75	6.15 6.45
深度規 Dep. gauge	1	2	2	2	2	2	3	3
針深 Recess dep. (Q)	1.35 1.70	1.15 1.65	1.88 2.28	1.88 2.28	2.30 2.69	2.68 3.05	2.75 3.15	2.95 3.50
針寬 Recess dia. (M)	2.74 REF	3.40 REF	4.22 REF	4.22 REF	4.60 REF	4.98 REF	6.35 REF	6.60 REF
桿徑 Rolling dia. (E)	2.11 2.16	2.36 2.40	2.59 2.64	2.84 2.90	3.23 3.28	3.68 3.73	4.24 4.29	4.80 4.86
牙外徑 Thread dia. (D1)	2.64 2.87	2.97 3.23	3.33 3.58	3.68 3.94	4.04 4.29	4.72 5.00	5.38 5.72	6.05 6.43
螺距 Thread pitch (P)	1.13	1.27	1.41	1.59	1.69	1.95	2.21	2.82
扭力Torque Nm	Above 1.5	Above 1.8	Above 2.0	Above 3.0	Above 4.3	Above 6.2	Above 10.8	

	1/2	5/8	3/4	1"	1-1/4	1-1/2	1-3/4	2"	2-1/4	2-1/2	2-3/4	3"	3-1/2	4"
SCREW LENGTH	11.6 12.7	14.78 15.88	17.95 19.05	24.3 25.4	30.65 31.75	36.5 38.1	42.85 44.45	48.9 50.8	55.25 57.15	61.6 63.5	67.95 69.85	74.3 76.2	86.4 88.9	99.1 101.6
THREAD LENGTH	FULL THREAD				29-31MM		36-38MM		49-51.5MM			55-58MM		

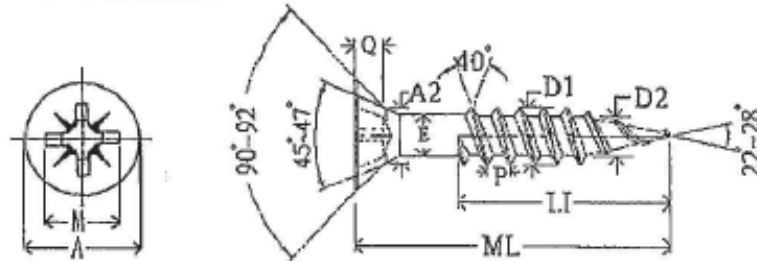