


Z750-400

BLACK FLOOR PROTECTION SHEET

A lightweight fluted polypropylene sheet for temporary protection of floors, walls, windows, doors, worktops and fitted units during construction, refurbishment and decorating.

The flexible sheet helps shield finished surfaces from dust, dirt, paint splashes, scuffs, scratches and light knocks, and can be cut, curved or creased to suit the area being protected.

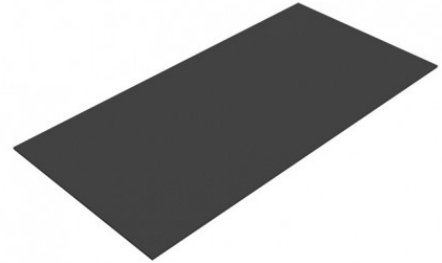

Product supplied with white Readyfix print

2.4 x 1.2m SHEET SIZE	2mm THICKNESS	250gsm BASIS WEIGHT
2.88m² COVERAGE	65% RECYCLED CONTENT*	NON-FR FIRE STATUS

FEATURES AND BENEFITS

LIGHTWEIGHT

Quick to handle, position and reposition on site.

EASY TO FIT

Cut, curve or crease with a sharp utility knife.

VERSATILE

Suitable for floors, walls, windows, doors and units.

NON-ABSORBENT

Helps protect finishes from everyday splashes and spills.

REUSABLE

Can be reused where the sheet remains clean and undamaged.

RECYCLABLE

100% recyclable* where suitable facilities are available.

TECHNICAL SPECIFICATION

PROPERTY	NOMINAL VALUE	TOLERANCE / METHOD	ADDITIONAL INFORMATION
Material / colour	Fluted polypropylene / black	-	Black regrind grade; no additive declared
Sheet size	2400 x 1200mm	Length ±5mm/m; width ±5mm	Coverage 2.88m²; squareness ±5mm/m
Thickness	2.00mm	±0.10mm	Nominal caliper
Basis weight	250g/m²	±5% per sheet; ±10% local	Approx. nominal sheet weight: 0.72kg
Polypropylene density	0.900-0.905g/cm³	ISO 1183	Polypropylene fraction
Recycled content*	65% calculated	Supplier composition	35% recycled plastic + 30% recovered production waste
Surface / print	Corona treated / white ink	Supplier declaration	Readyfix branding printed in-line
Fire classification	None	No Euroclass stated	Standard non-flame-retardant sheet

INSTALLATION GUIDANCE

1 PREPARE

Make the surface clean, dry and free from grit.

2 LAY

Position sheets to cover the complete work area.

3 CUT

Trim on a sacrificial surface; never cut against the finish.

4 SECURE

Tape joints and edges to reduce movement and trip risk.

HANDLING, STORAGE AND LIMITATIONS

- Store flat in ambient, dry conditions.
- Avoid prolonged direct sunlight, high temperature and humidity.
- For temporary internal use and short-duration external protection only; secure against wind and weather.
- Test tapes on an inconspicuous area before contact with finished or sensitive surfaces.
- Not approved for direct food contact.
- Not load-bearing and not a substitute for certified flame-retardant protection.

IMPORTANT

This is a NON-FLAME-RETARDANT sheet and has no stated Euroclass fire classification. Use a suitably certified FR protection product where the site specification requires one.

* Recycled content comprises 35% recycled plastic and 30% recovered production waste by calculated sheet mass. Recyclability is subject to the sheet being clean, correctly sorted and accepted by local facilities.

The figures above are based on supplier technical data and are nominal unless a tolerance is shown. This document is guidance only; users must confirm product suitability for the intended surface, fixing method, site conditions and specification.

READYFIX LTD

Croft Street, Preston, Lancashire, PR1 8XD

CONTACT

01772 250060 | sales@readyfixuk.co.uk

ONLINE

readyfixuk.co.uk | Product code Z750-400